

DS-3500

The DS-3500 Professional Dictation System from Olympus is a robust, user-friendly tool for improving organisational efficiency.



Featuring intuitive push-button controls and multiple recording formats, the DS-3500 is the ideal solution for streamlined data entry or conference recording. The included Olympus Dictation Management System software integrates directly with existing workflows, third-party applications and voice-recognition software, allowing users to automatically route files for transcription or archiving, and manage preferences and security settings individually or system-wide.

Product Features



Reliable security features

The DS-3500's 256 bit Advanced Encryption Standard (AES) system protects recorded data from illegal access, even when transferring files. The 256 bit AES is supported when

recording in DSS Pro format. The AES encryption system meets the high security standards set by governments worldwide for securing data. In addition to securing the data, the DS-3500 Device Lock feature protects the device itself from unauthorised access using a 4-digit PIN code.



Stereo recording capability with live atmosphere

With the built-in stereo microphone jack and support for stereo recording formats such as WAV and MP3, the DS-3500 can be used not only for dictation, but also to record interviews and meetings by connecting an external stereo microphone such as the Olympus Boundary Microphone (ME-33).



Large 2 inch TFT display with 65,000 colours

The DS-3500 features a 2 inch TFT colour LCD with LED backlight. This is 46% larger than previous models and supports 65,000 colours, making information on-screen much easier to read. Checking operation status takes only a glance. A button guide can also be displayed.



Push button operation

The robust push button is built for heavy usage, tactile operation and precise control without compromising ergonomics. Cleverly positioned on the side of the unit, the push button positions allow users comfortable and natural control when holding the device.

Specifications


KEY FEATURES	
Main switch (REC / STOP / PLAY / RWD)	Push buttons
Display	Colour TFT-display with white LED backlight Resolution: 176 x 220 pixel Size: 34mm x 42mm
Battery	Rechargeable Li-ion-battery (710mAh) Up to 26 hours of recording time with one battery charge
Data security	DSS Pro real-time encryption (128 bit / 256 bit)
Storage media	Secure Digital (SD, SDHC), 2GB-32GB
Internal storage media	2GB (micro SD), DSS Pro SP = approx. 306 hrs rec. time
RECORDING FORMATS	
DSS/DSS Pro	Quality play (16kHz / 28kbps) Standard play (12kHz /13.7kbps)
PCM (mono / stereo); MP3	✓
PROFESSIONAL SPEECH PROCESSING	
Author IDs	10
Worktypes	20
Priority	High / Normal
Verbal comments, Text editor, Pending, File lock	✓
ADVANCED RECORDING FEATURES	
Voice activated recording (VCVA)	✓
Microphone sensitivity	Dictation / Conference
Insert, Overwrite, Append, Partially erase	Only with DSS Pro & DSS
Index Marks Per File	32 (DSS Pro), 16 (DSS, MP3, WAV)
Level meter, VCVA indicator	✓
Folders	Up to 7 (name changeable)
Hands-free dictation, stand-alone transcription	With optional Olympus Footswitch RS-31 or Hand Controller RS-32
Full-duplex recording	With headphones
PLAYBACK	
Speed	Slow / Normal / Fast
Volume level	Adjustable from 0 to 30
STATIONARY OPERATIONS	
Applicable as PC microphone	✓
Controlling PC application ODMS	✓
ADMINISTRATIVE SETTINGS	
Accessibility	Various settings related to user authorisation, e.g., prohibiting erasing of files; menu settings
Splash message	Option to set personalised welcome message during start-up
Alarms	Option to set alarms for particular occasions; beeping noise
Customisable display content	Option to customise information shown on display
Programmable buttons	3
Stand alone and workgroup install options	✓
Server installations including license manager and manager tools (optional)	✓
Citrix / WTS	✓
TECHNICAL DATA	
Dimensions (H x W x D); weight	114.5 x 50 x 17mm / 107g (including battery)
Languages	English, Spanish, French
Operating systems	Microsoft Windows (XP, Vista, 7, 8) Mac OS X
Recommended operating condition	0-42°C
USB	Mini USB 2.0 composite / storage class
Charging	Via AC adapter or USB
Speaker (integrated)	Ø 23mm / 300mW
Headphone/microphone jacks	Stereo, 3.5mm, 2kΩ / Stereo, 3.5mm, 8kΩ
Toshiba FlashAir™ card compatibility	✓

Specifications and design are subject to change without notice

Accessories (included)



Performance Features

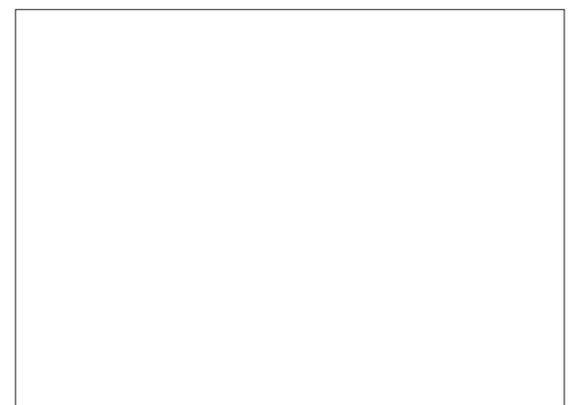

OLYMPUS IMAGING AUSTRALIA PTY LTD
For more information visit olympus.com.au

ABN 12 110 126 960